



FIXTURE TYPE:	LED FRAME LIGHT
NOTES:	
UPDATED DATE:	Feb, 2022

LED FRAME LIGHT



PRODUCT OVERVIEW

The frame light give a beautiful, uniform and soft light on the surface.

Depending on your preference and design,you can assemble a variety of different shapes to make room lighting full of art.

KEY FEATURES

- Wattage adjustable and CCT tunable.
- The frame houses LED chips around 4bars,nice and soft illumination
- High lumen efficient 125lm/w.
- Frame recessed in the ceiling installation,remain the original ceiling,no need other processing
- ETL listed.
- 5 years warranty.
- Full series:2*2FT,2*4FT,1*4FT
- Separated driver,more flexible for installation.
- 0-10V dimmable in standard configuration.

APPLICATION

- Office/shool
- Subway&train station
- Supermarket,etc

PERFORMANCE SUMMARY


Construction & Materials	
Diffuser	PC optical cover
Housing	6063 Aluminum Frame
Finish	Pure White
Environmental System	
Work Environment	Suitable for dry and damp location
Operating Temperature	-20°C to 45°C
Parameter	
CRI	>85
Efficacy	125lm/w-140lm/w(125lm/w on average)
CCT	Single color:3000K,3500K,4000K,5000K,5700K,6500K 3CCT tunable:4000K-5000K-6500K 3CCT tunable:3000K-4000K-5000K
Input Voltage	100-277Vac; 50/60HZ
Wattage	2*2FT 40W
	1*4FT 30W
	2*4FT 60W
Dimming	0-10V dimming
Certification	cETLus

ORDING GUIDE

Example: MC-TB22F-40XXX

PRODUCT	SIZE	Wattage	First X Color/CCT	Second X Emergency	Third X Input Voltage
TB T-bar frame light	22F 2x2FT	30 30W	A 3000K	N NO	Blank 120-277Vac
	14F 1x4FT	40 40W	B 3500K	Blank YES	A 120-347Vac
	22F 2x4FT	60 60W	C 4000K D 5000K E 6500K H 5700K I 4000-5000-6500K K 3000-4000-5000K		

DIMENSIONS

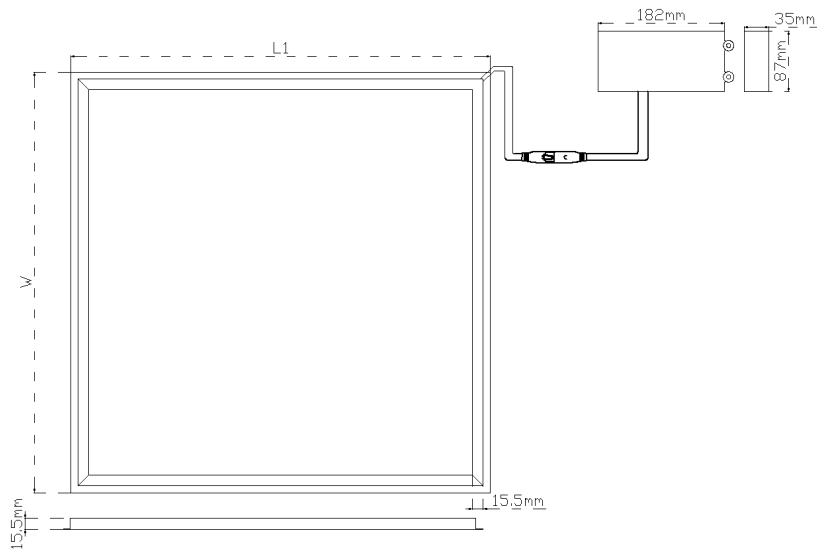

Size	Length	Width	Height
MC-TB22F-40XXX	23.74"	23.74"	0.61"
MC-TB24F-60XXX	47.75"	23.74"	0.61"
MC-TB14F-30XXX	11.93"	23.74"	0.61"