



FIXTURE TYPE:	UP AND DOWN WALL SCONCE
NOTES:	
UPDATED DATE:	Sep, 2023

IP66 UP AND DOWN WALL SCONCE



PRODUCT OVERVIEW

Up and down lights give your outdoor space a bright modern look with this contemporary outdoor wall light fixture.

The sleek style shines light upwards or downwards for atmospheric ambient light as well as useful illumination along walkways.

The cylinder design is constructed from solid aluminum and features a bronze finish with an tempered glass lens

KEY FEATURES

- colorful and beautiful: red, yellow, blue, green, white, warm white.
- PMMA lenses over LEDS diffuser
- Designed with the look of traditional Embedded and Suspending mounting.
- cETLus, listed.
- 3years warranty.
- Full series wattages to meet different demands.
- High quality powder coating aluminum housing, excellent for heat management.
- IP66 rated, dirt and bug free.
- Easy installation



APPLICATION

- wall of building
- Hotels, houses
- Courtyard

PERFORMANCE SUMMARY

Construction & Materials	
Diffuser	PMMA lens and tempered glass
Housing	Powder coating rust against Sheet Metal Board & 6063 Aluminum Frame
Finish Color	Black (Other color can be customized and requires a MOQ.)
Environmental System	
Work Environment	Suitable for wet location
Operating Temperature	-40°C to 50°C
Parameter	
CRI	>80(white only)
Efficacy	100lm/w on average(white only)
Colour	cool white,warm white red,yellow,blue,green
Input Voltage	100-277Vac; 50/60HZ
Size/Wattage	φ 4.25"*11.8" 2*9W,2*12W
	φ 5.75"*11.8" 2*18W,2*24W
	φ 4.25"*7.87" 1*9W,1*12W
	φ 5.75"*7.87" 1*18W,1*24W
Lens angle	30 degree in standard
Dimming	non
Certification	cETLus
IP grade	IP66

ORDING GUIDE


Example: MC-WL-UXXX-PX

PRODUCT <input type="text"/>	Frist X style <input type="text"/>	Second X wattage <input type="text"/>	Third X diameter <input type="text"/>	Fourth X color <input type="text"/>
WL wall sconce	UD up and down UP up/down only	9 9w 12 12w 18 18w 24 24w	A φ 4.25" B φ 5.75"	R red G green B blue W 6500k C 4000k D 5000k E 6500k A RGB

CUT SHEET



DIMENSIONS

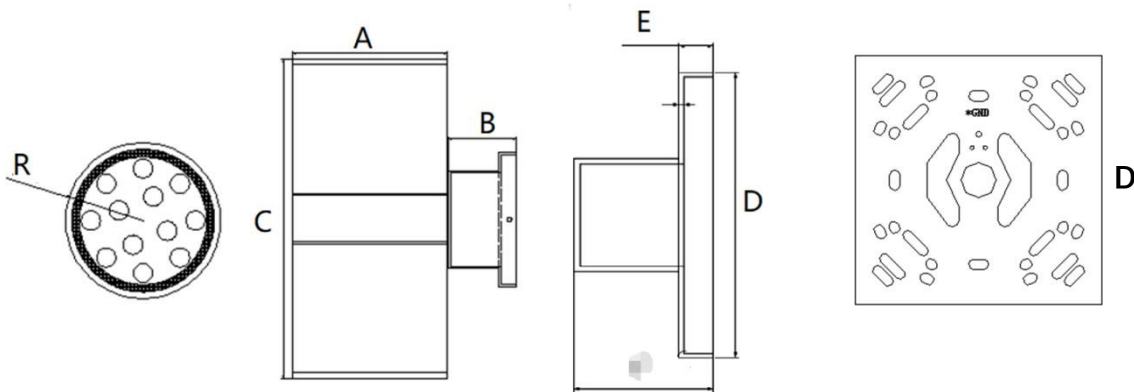

wattage	Dimension(inch)				
	A	B	C	D	E
2*9w	4.25"	2.51"	11.8"	5"	0.63"
2*12w	4.25"	2.51"	11.8"	5"	0.63"
2*18w	5.75"	2.51"	11.8"	5"	0.63"
2*24w	6.3"	2.51"	11.8"	5"	0.63"

1*9w	4.25"	2.51"	7.87"	5"	0.63"
1*12w	4.25"	2.51"	7.87"	5"	0.63"
1*18w	5.75"	2.51"	7.87"	5"	0.63"
1*24w	6.3"	2.51"	7.87"	5"	0.63"

PACKAGING INFORMATION



wattage	2*9W,2*12W	2*18W,2*24W	1*9W,1*12W	1*18W,1*24W
pc/inner box	1pc/inner box	1pc/inner box	1pc/inner box	1pc/inner box
pc/ctn	6pc/ctn	4pc/ctn	6pc/ctn	4pc/ctn
size/ctn (m)	0.62*0.345*0.335	0.495*0.345*0.42	0.67*0.24*0.42	0.54*0.24*0.42
kg/ctn	12.32	12.39	8.9	9.53
cbm/ctn	0.07	0.07	0.07	0.06



www.hiluxlight.com

0086-0075-23727896 info@hiluxlight.com

ADD:Shenzhen,GuangDong Province,China