



FIXTURE TYPE:	LED BOLLARD LIGHT
NOTES:	
UPDATED DATE:	May, 2025

LED BOLLARD LIGHT



PRODUCT OVERVIEW

Our LED bollard light use high-efficiency and energy-saving LED light source to provide bright yet soft lighting,perfect for various outdoor areas.The product features an exquisite design and robust durability,capable of with standing harsh weather conditions to ensure long-term stable operation. Field adjustable Wattage and CCT, and available with photocell.

KEY FEATURES

- Detachable head, different styles for optional
- Die-cast aluminum body
- Clear polycarbonate lens
- Multiple CCT and Wattage Selectable
- Waterproof IP65, salt mist against.
- 120~277 or 120-347V input.
- Dusk to Down, photocell control available.


APPLICATION

Ideal for garden lawns,park pathways,residential areas,commercial plazas,resorts,and other outdoor spaces,adding safety and beauty to your environment.

PERFORMANCE SUMMARY

Construction & Materials	
Diffuser	Clear acrylic lens
Housing	Aluminum
Finish Color	Black
Environmental System	
Work Environment	Suitable for wet location
Operating Temperature	-40°F(-40°C) ~ 122°F (50°C)
Parameter	
CRI	>80
Efficacy	
CCT	5CCT Selectable: 3000/4000K/5000K/5700K/6500K; 3CCT Selectable: 3000/4000K/5000K;
Input Voltage	120-277Vac / 120-347V; 50/60HZ
Wattage	4 Wattage Selectable: 12W, 16W, 22W, 30W; 3 Wattage Selectable: 12W, 16W, 22W;
Dimming	Not go with dimmer
Photocell	With or without Photocell optional
Certification	cETLus

DIMENSIONS

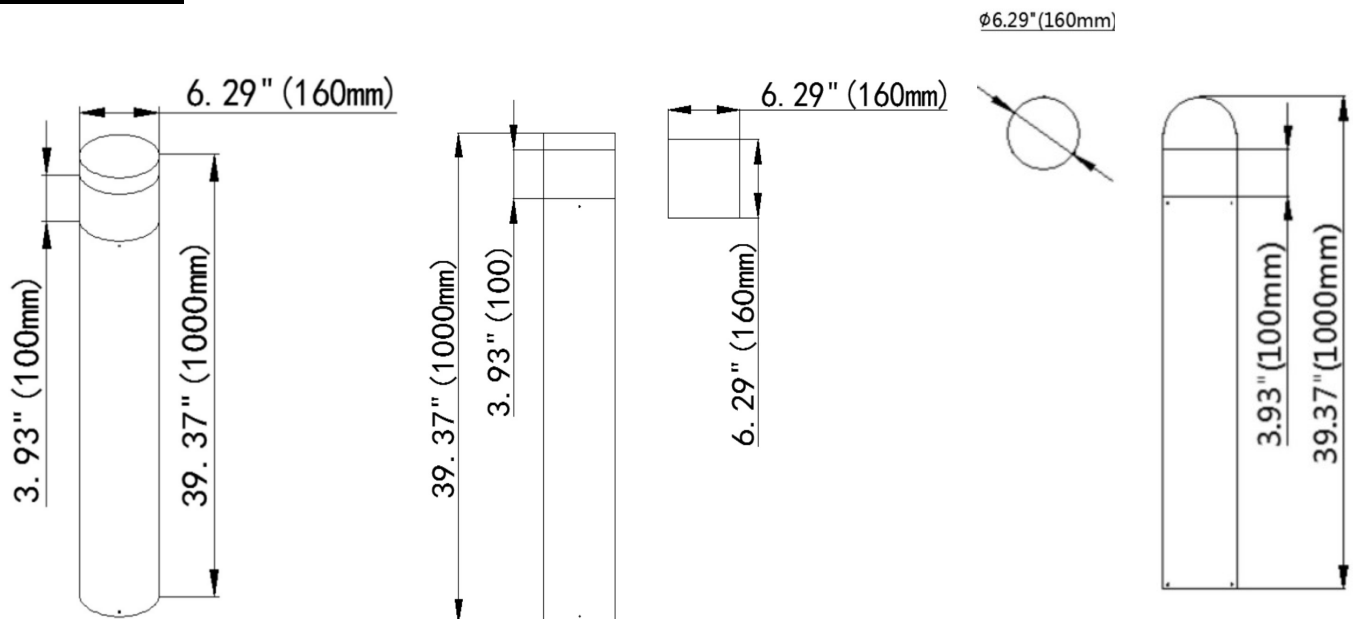

Web: www.hiluxlight.com E: info@hiluxlight.com

Production Center: Yongxing Industry Park, Yongxing

North Road 36#, Henglan Town, Zhongshan, Guangdong, China